

# EXTENSION LANYARD

WEBBING

Ref. 203003F

CONSTRUCTION, ROOFS, TOWERS/INDUSTRY

Webbing lanyard to create an extension of the dorsal attachment point of a full body harness. This allows the attachment point to be shifted from the back to the shoulder for easier access.

Can be attached to any full body harness using the steel quick link and velcro strap.

Ref. **203003F** + 0934 + 2046 30 cm

**OVAL QUICK LINK STEEL Ref.0934**  
Oval quick links made of zinc plated carbon steel. 8 mm diameter.  
To be attached to dorsal attachment point of the harness

**0934**

Polamide tubular webbing.  
Width 27 mm


Velcro strap

**2046**

CE label with Batch and individual Serial number

High strength polyamide stitching

**ACCESS RING Ref.2046**  
Aluminum alloy connection ring.  
Diameter:  
Int.34 mm - Ext.54 mm

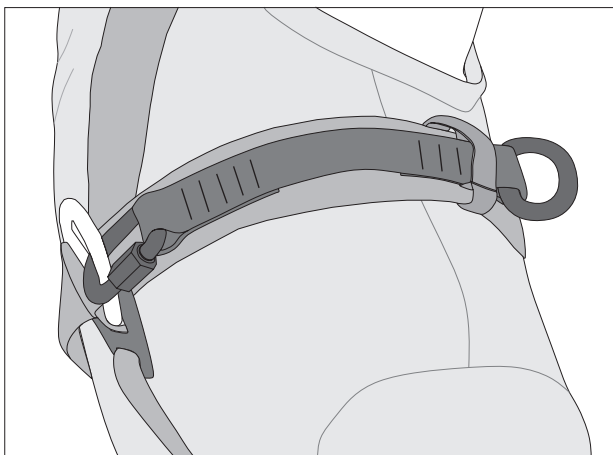

Ref.	Product name	Weight		Strength	CE		ERC
		g	oz	kN	EN 354	EN 795/B	
203003F	EXTENSION LANYARD 0934 + 2046 30 cm	155	5.5	22	•	•	•