


High strength aluminum alloy connector for use on metal structures. Large opening for connecting to beams and tubes up to 62 mm. ANSI and CSA certified with 16 kN / 3600 lbs gate strength.

Double lever locking system ensures a high level of safety and ease of use.

2022 UPDATE: new name (HOOK PLUS 62 mm instead of ANSI HOOK 62 mm).

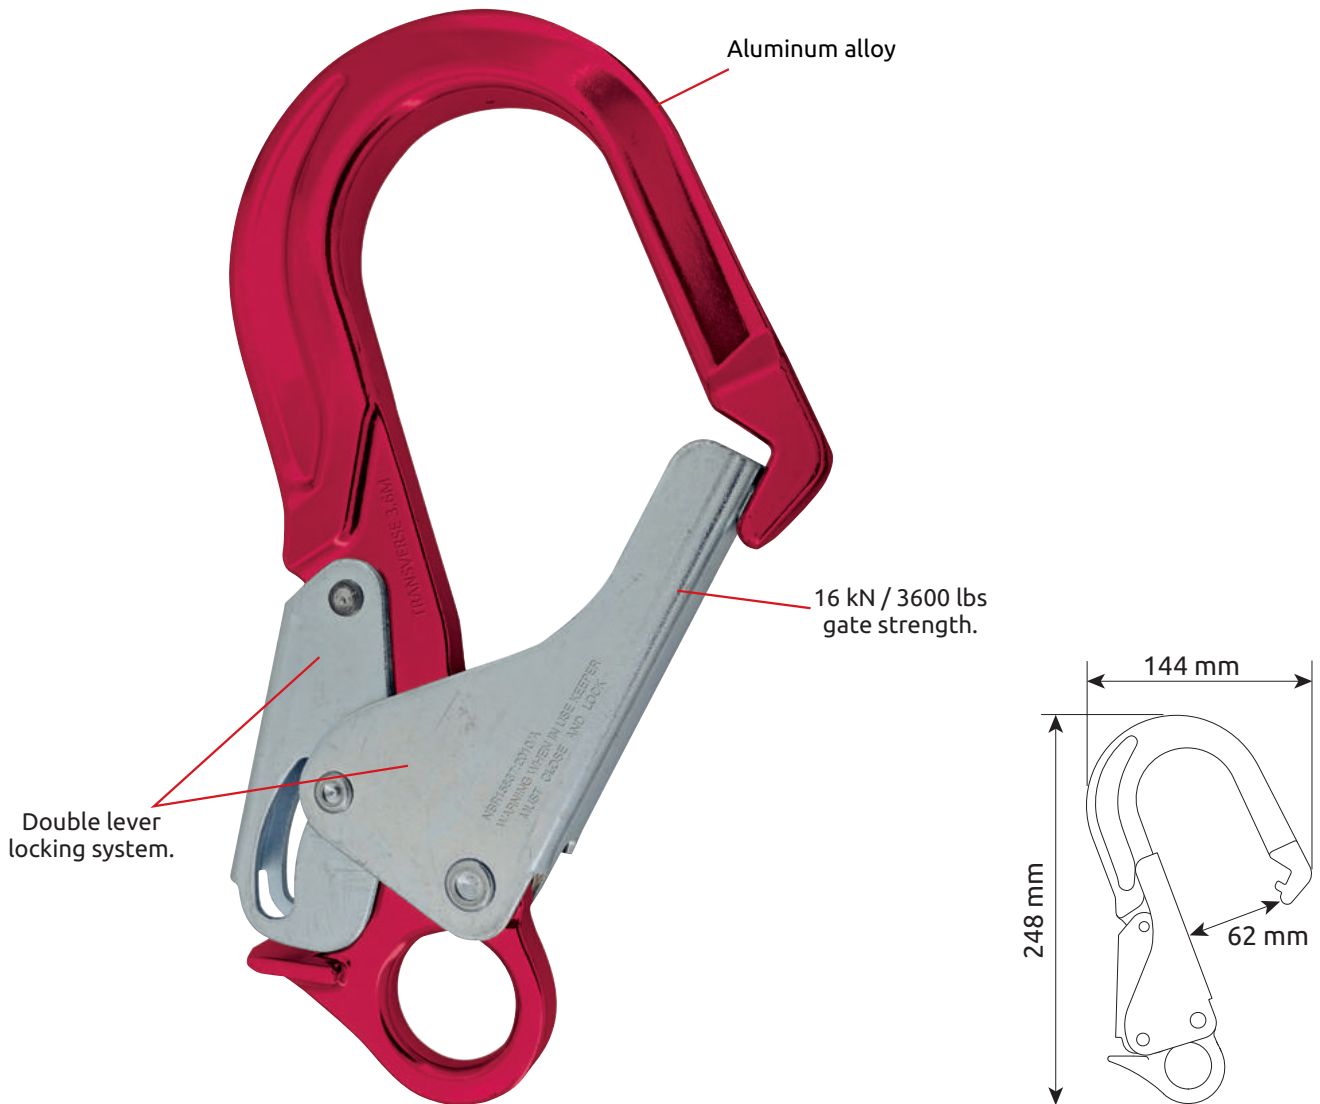

Ref.	Product name	Weight		↺	↻	↻ ^{mm}	mm	mm	CE	EAC	ANSI	CSA
		g	oz									
2148	HOOK PLUS 62 mm	630	22.2	23	16	62	248	144	A		•	•