

2120 ORBITAL

Full body harness and belt for work positioning.
4 attachment points: 1 front, 1 back, 2 side.
New conception full body harness whose structure is especially developed in order to increase comfort for movements during working and for suspension after fall as well, reducing thus the dangerous effects of suspension trauma.
"Orbital" is completed with a comfortable padded belt for work positioning.

Comfort of the new webbing structure is increased also by the double-thickness paddings on leg-loops and belt.

The weight of "Orbital" is reduced to the minimum thanks to the use of few metal components: all the attachment points are made with lightweight double-layer webbing loops.

"Orbital" is equipped with two small loops needed for the application of the suspension trauma straps "HelpStep" ref.2062.




CE EN 358 - EN361

PYLONS/INDUSTRY

CONSTRUCTION




1350



SIZE	A (cm)	B (cm)	C (cm)	D (cm)
1 S-L	80-120	70-110	45-65	55-75
2 L-XXL	90-140	80-130	55-75	65-85

● = Fall arrest attachment element

● = Attachment element for work positioning




- ① Polyester main webbings width 44 mm.
- ② CE label including serial number.
- ③ Quick adjustment chest buckles made of carbon steel.
- ④ "A/2" front attachment point for fall-arrest. Made with a double layer of webbing.
- ⑤ Sternal plastic buckle.
- ⑥ New construction with movable side junctions improves suspension comfort.
- ⑦ Quick adjustment belt buckle made of carbon steel. Openable.
- ⑧ Side attachment points for work positioning. Made with a double layer of webbing.
- ⑨ Polyamide leg-loops webbings width 25 mm.
- ⑩ Patented "SICURA" quick adjustment buckles.
- ⑪ Leg-loops padding with double-thickness: 6 mm for the groin area, 9 mm for the back support. Inside layer made of breathable 3D mesh.

2120 **ORBITAL**



- ① Back padding. Thickness 3 mm. Inside layer made of breathable 3D mesh.
- ② “A” back attachment point for fall-arrest. Made with a double layer of webbing.
- ③ Central webbing for bel support.
- ④ Loops for the installation of “Help Step” suspension trauma straps ref.2062
- ⑤ Belt padding with double-thickness: 6 mm for teh perimeter, 9 mm for the central part. Inside layer made of breathable 3D mesh.
- ⑥ 2 wide gear-loops.
- ⑦ Small loops for the installation of the “Tools-Bag” ref.2195.
- ⑧ Leg-loops back webbings. Elastic and adjustable.
- ⑨ Webbing keepers for the size adjustment of leg-loops padding.

INSTALLATION OF “HELPSTEP”
SUSPENSION STRAPS REF.2062

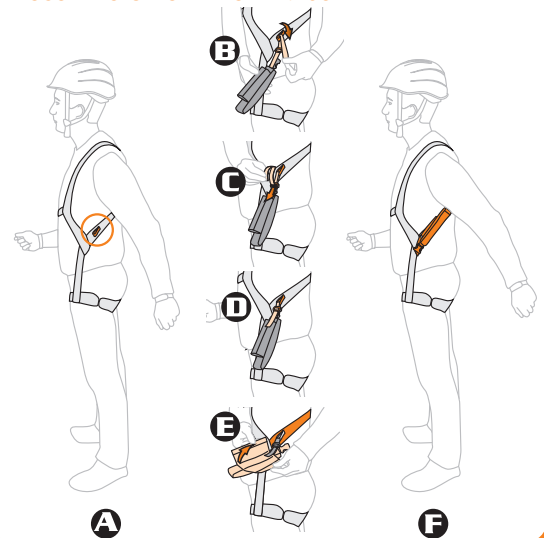

TECHNICAL DRAWINGS

