


Ref.2815 PRIUM IO.5 mm

The Prium uses a polyester sheath for low elongation and increased resistance to the effects of humidity, dirt and dust. The super strong polyamide core combines with the 32 carrier sheath for good handling and twisted yarns for a very high level of abrasion resistance.

The suppleness of the Prium 10.5 mm makes it a great choice for use with ascenders and descenders.

ROPE ACCESS TEAM RESCUE TREE CLIMBING GENERAL

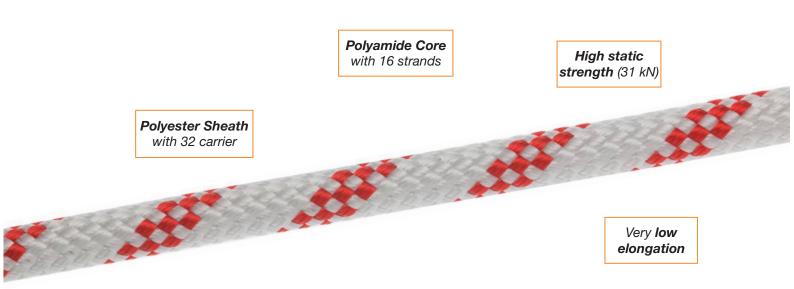

Available in White/Red colour.

Lenghts: Ref.2815-501: 50 m

Ref.**2815-2001**: 200 m Ref.**2815-6001**: 600 m Sheath is made with **twisted yarn**, which improve abrasion, resistance and durability of the rope

Ref.	Product name Nombre del producto	Length ducto Longitudes		eight eso	Static strength Resistencia estática	Static strength w/ figure 8 knot Resistencia estática con nudo de 8	No. of factor 1 falls (100kg) Número de caídas factor 1 (100 kg)	Fall factor 0.3 impact force Fuerza de choque (factor de caída 0,3)	Static elongation Elongacion estática	Sheath slippage Deslinzamiento de funda	Sheath Porcentaje de funda	Shrinkage in water Encogimiento en mojado	Material	<€
			g/m	oz/m	kN	kN		kN	50/150 kg (%)	mm				EN 1891
2815	PRIUM 10.5 mm	50 m		74 2.6	31	17.8	13	5.9	1.8	0	37	2.5	PA6 - Polyester PA6 - Poliéster	А
		200 m	74											
		600 m												