




Fall arrest lanyards constructed from 10.5 mm polyamide static rope. Kernmantle rope with an internal core and woven sheath offers optimal durability. Equipped with energy absorber (ref.2029). Protective system for rope loops and stitching is incredibly compact and robust. Certified for horizontal use over sharp edges ($r \geq 0.5$ mm).

EDGE TESTED



Certified for horizontal use over an edge

SINGLE + 0981 + 2017 190 cm

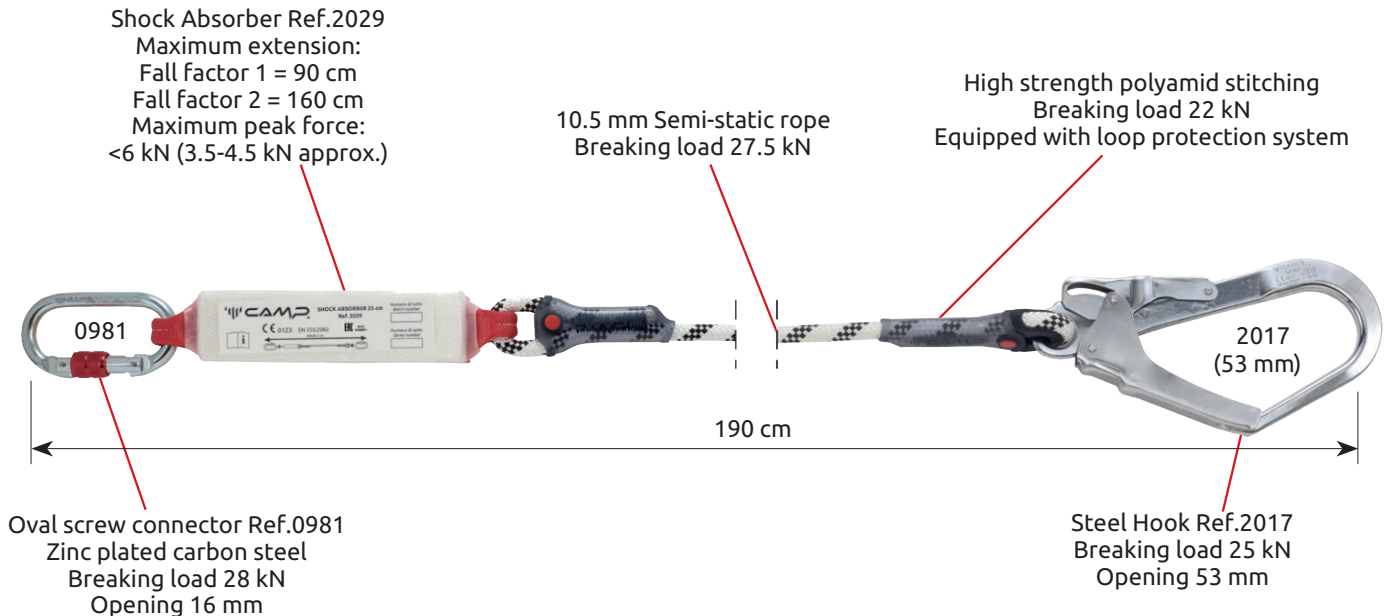

Ref.	Product name	Weight		Strength	Working load Max	CE	
		g	oz	kN	kg		
5030106	SHOCK ABSORBER ROPE SINGLE + 0981 + 2017 190 cm	1020	36.0	15	100	•	PPE-R/11.074