




Fall arrest lanyards constructed from 10.5 mm polyamide static rope. Kernmantle rope with an internal core and woven sheath offers optimal durability. Equipped with energy absorber (ref.2029). Protective system for rope loops and stitching is incredibly compact and robust. Certified for horizontal use over sharp edges ($r \geq 0.5$ mm).

EDGE TESTED



Certified for horizontal use over an edge

DOUBLE + 0981 + 2x2017 190 cm

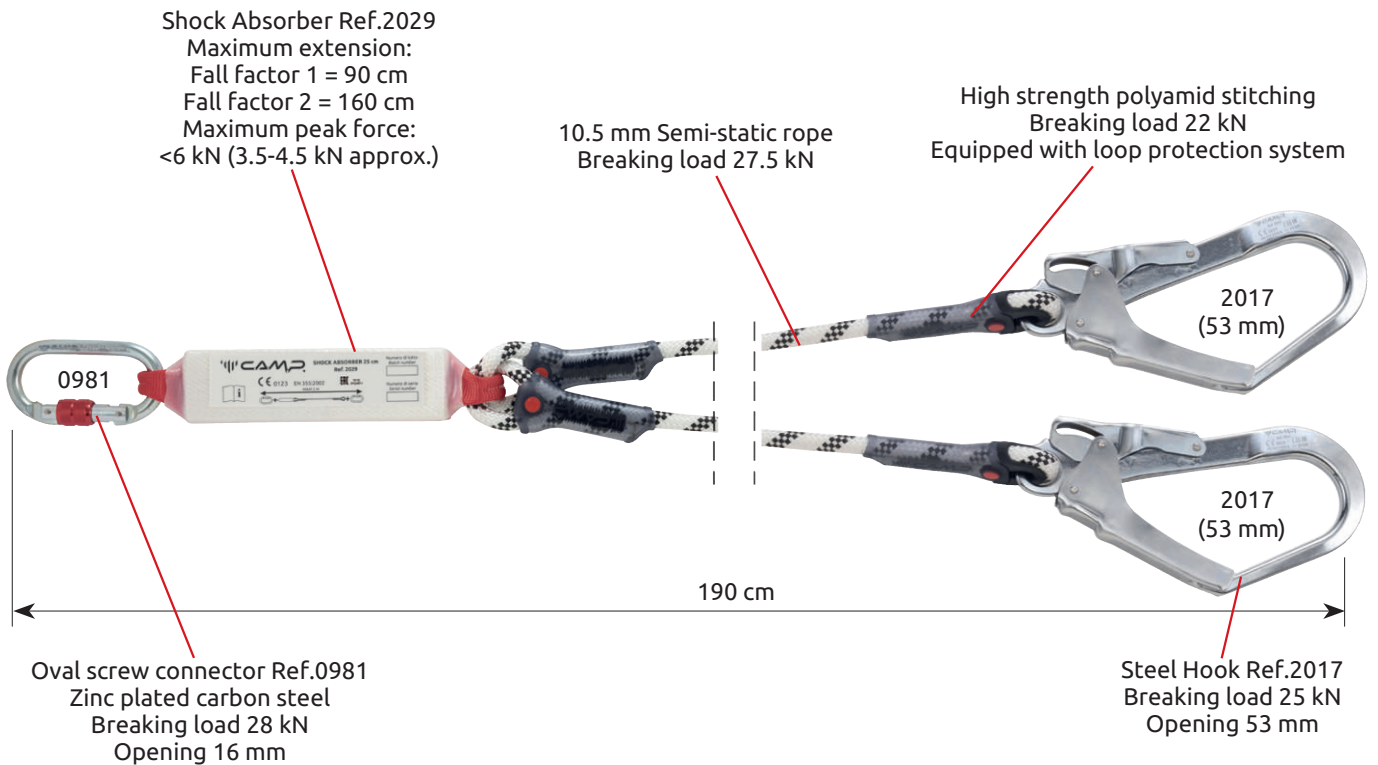

Ref.	Product name	Weight		Strength	Working load Max	CE	 PPE-R/11.074
		g	oz	kN	kg		
5030201	SHOCK ABSORBER ROPE DOUBLE + 0981 + 2x2017 190 cm	1660	58.6	15	100	•	•