


Fall arrest lanyards constructed from 12.5 mm polyamide.

Kernmantle static rope equipped with a steel ring length adjustment system. Equipped with energy absorber (ref.2029).

DOUBLE + 0981 + 2x2017 145-200 cm

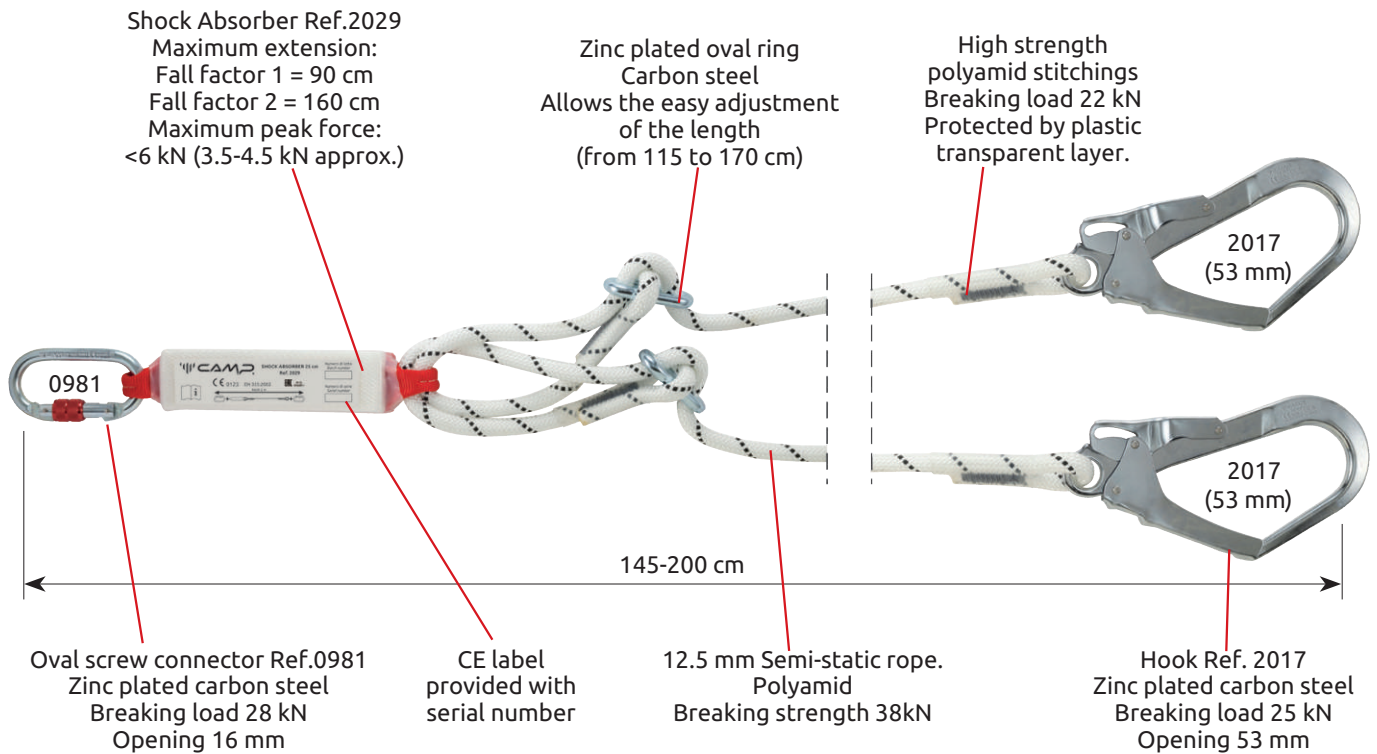

Ref.	Product name	Weight		Strength	Working load Max	CE
		g	oz	kN	kg	
5130201	SHOCK ABSORBER ROPE ADJUSTABLE DOUBLE + 0981 + 2x2017 145-200 cm	1970	69.5	15	100	EN 355